## **Assembly Instructions**

This instruction booklet contains important safety information, please read and keep for future reference.

#### ITEM # HI3DR-G (MOP-SP)

3 DRAWER CHEST














**FRONT VIEW** 

**BACK VIEW** 

Product Dimensions: Height 30.59" x Width 31.49" x Depth 15.86"

Weight Capacity Per Drawer 25lbs







Mon - Fri | 9:30 am to 5pm EST

Send us an email

Visit our website to open a case

1 - 855 - HODEDAH

Support@Hodedah.com

www.Hodedah.com

1 - 855 - 463 -3324

#### Questions, need parts, we are here to help!

FOR PROMPT, RELIABLE SERVICE PLEASE HAVE YOUR INSTRUCTION MANUAL READY



#### DO NOT RETURN PRODUCT TO THE STORE

If parts are missing or damaged please contact our customer service team and we will gladly ship your replacement parts FREE of charge within **ONE YEAR** of purchase!

#### **WARRANTY**

Hodedah warrants this product to be free from defects in materials and workmanship and agrees to remedy any such defect. This warranty covers one year from the date of original purchase. This is solely limited to replacement of defective parts and no assembly for labor is included. This warranty does not apply to any product that has been improperly assembled, subjected to misuse, abuse or which has been altered or repaired in any way. To obtain warranty service, original purchaser must present the following; original bill of sale, date of purchase, where the product was purchased and images if applicable. Components replaced warranted through the remainder of the original warranty only. The defective part will be replaced without charge, subject to the terms and conditions described above.

#### WARNING

- This product contains small parts, keep away from children.
- This product contains plastic bags, keep away from children.
- Serious or fatal crushing injuries can occur from furniture tip-over. To help prevent this, place heaviest items on the lower shelves and drawers. Do not set heavy objects on top shelves and drawers.
- Never allow children to climb or hang on drawers, shelves and doors.
- Never open more than one drawer at a time.
- The use of tip-over restraints may reduce but not eliminate the risk of tip-over.

www·Hodedah·com 2 | Page

- Never open more than one drawer at a time.
- The use of tip-over restranits may reduce but not eliminate the risk of tip-over.

## Let's get started...

#### Helpful hints, read before beginning assembly

- Make sure you receive all boxes. If your item is packed in one box, box count will read 1
  of 1, likewise if your item is packed in two boxes, box count will read 1 of 2 and second
  box will read 2 of 2.
- Read each step carefully. It is very important that each step is performed in the correct order. If these steps are not followed in sequence, assembly difficulties will occur.
- Work in a spacious level area, preferably carpet, near the place the unit will be used.
- **DO NO USE** power tools to assemble your furniture, it will strip and damage parts.
- Your package should include the following hardware and parts. Parts are labeled or stamped on the raw edge. Please inspect contents to ensure you have received all components. If you are missing any hardware or parts please contact customer service right away before assembly.

### **Assembly Tools Required** (not supplied)



Hammer



Phillips Screwdriver



Tape Measure



No Power Tools Needed

#### **Product Care and Maintenance**

- Wipe clean with dry soft cloth, never use chemicals or cleaning products they will damage the finish.
- Avoid placing your furniture in direct sunlight, as sunlight causes fading.
- Never push, drag or pull your furniture, to move to a new location carefully with two or more people carry the unit to its new location.
- Avoid extreme changes in temperature by arranging furniture away from radiators, heat and air vents and air conditioning units.


www-Hodedah·com 3 | Page

### **Hardware List**

| 1               | QTY     | 2                  | QTY    | 3  | QTY    |
|-----------------|---------|--------------------|--------|--|--------|
| Screw M6 x 40mm | 8 Pcs   | (#))\(\tag{\psi}\) | 15 Pcs |  | 24 Pcs |
| Pvc Cap         | 8 Pcs   | Screw M4 x 32mm    |        | Screw M3.5 x 14mm<br>*For # 11 Drawer Slides     |        |
| 5               | QTY     | 6                  | QTY    | 7  | QTY    |
| Mini Fix        | 16 Sets |                    | 24 Pcs |  | 12 Pcs |
| Pvc Cap         | 16 Pcs  | Pvc Dowel          |        | Screw M6.2 x 10mm<br>*For # 10 Drawer Slides     |        |
| 8               | QTY     | 9                  | QTY    | 12   | QTY    |
| 0               | 45 Pcs  |                    | 1 Pc   |  | 1 PK   |
| Nail            |         | Allen Key          |        | Anti-Tip Kit<br>(separate from<br>hardware pack) |        |

www·Hodedah·com 4 | Page

#### **Accessories**

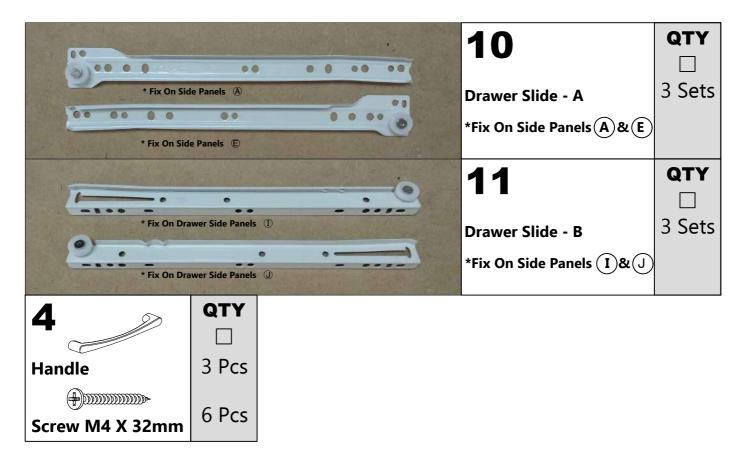



### **Important**

- 1. Before you throw the package, please use the Check Box to identify the parts and hardware to ensure that you have everything you need.
- 2. Check and measure the bolts before applying them to parts.
- 3. Do not completely tighten all hardware until the entire assembly is complete, unless indicated otherwise.


www-Hodedah·com 5 | Page

### **Parts List**

| Left Side Panel<br>762 x 394 x 15mm            | QTY   | Kick Panel (Front)<br>766 x 90 x 15mm | QTY   | Kick Panel (Back) & Back<br>Strengthening Panel<br>766 x 400 x 15mm | QTY   |
|--|-------|---------------------------------------|-------|---|-------|
|  | 1 Pc  |                                       | 1 Pc  |   | 1 Pc  |
| Front Strengthening Panel 766 x 76 x 15mm      | QTY   | Right Side Panel<br>762 x 394 x 15mm  | QTY   | <b>Top Panel</b> 699 x 394 x 15 mm                                  | QTY   |
|  | 1 Pc  |                                       | 1 Pc  |   | 1 Pc  |
| <b>C</b> Drawer Front Panels 759 x 218 x 15mm  | QTY   | Back Panels 795 x 397 x 3mm           | QTY   | Drawer - Left Side Panels<br>338 x 140 x 15mm                       | QTY   |
|  | 3 Pcs |                                       | 1 Pc  |   | 3 Pcs |
| Drawer - Right Side Panels<br>338 x 140 x 15mm | QTY   | Drawer End Panels<br>711 x 140 x 15mm | QTY   | Drawer Base Panels<br>740 x 343 x 3mm                               | QTY   |
|  | 3 Pcs |                                       | 3 Pcs |   | 3 Pcs |
| Drawer Support Panel<br>338 x 56 x 15 mm       | QTY   |                                       |       |   |       |
|  | 3 Pcs |                                       |       |   |       |

www·Hodedah·com 6|Page


## **The Breakdown**

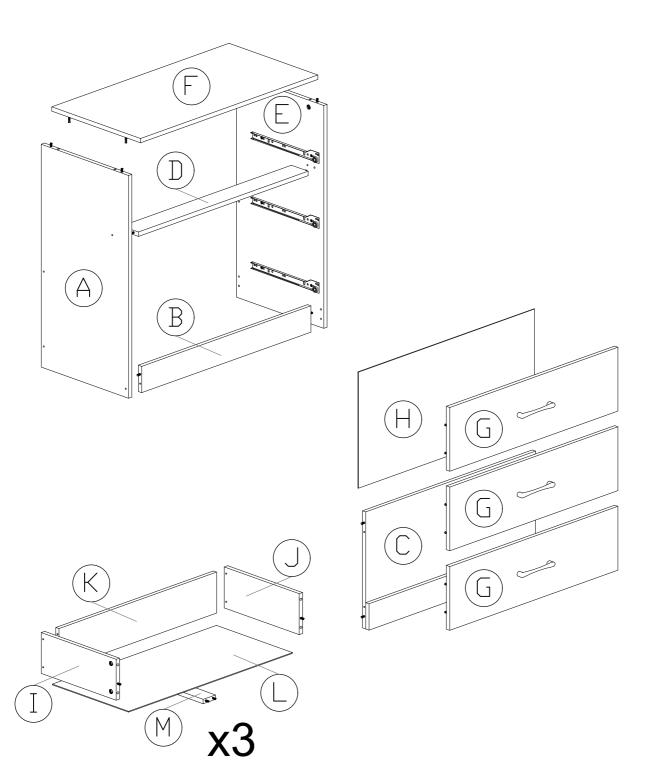


www·Hodedah·com 7 | Page

### **Pre - Assembly**


- 1. Place the drawer slide A 10 onto the 2 holes area shown at left side of panels A and right side of panel E. Then tighten it with 2 screws 7 and 1 screw 3. Do the same for the 3 other slide A 10.
- 2. Insert the mini fix 5 (nuts) with the cross arrow mark facing outward and aim to panels A and E 's top thru holes. (As shown)
- 3. Insert the pvc dowels 6 to panels A and E 's non-thru holes as shown, using hammer to gently tap them in.

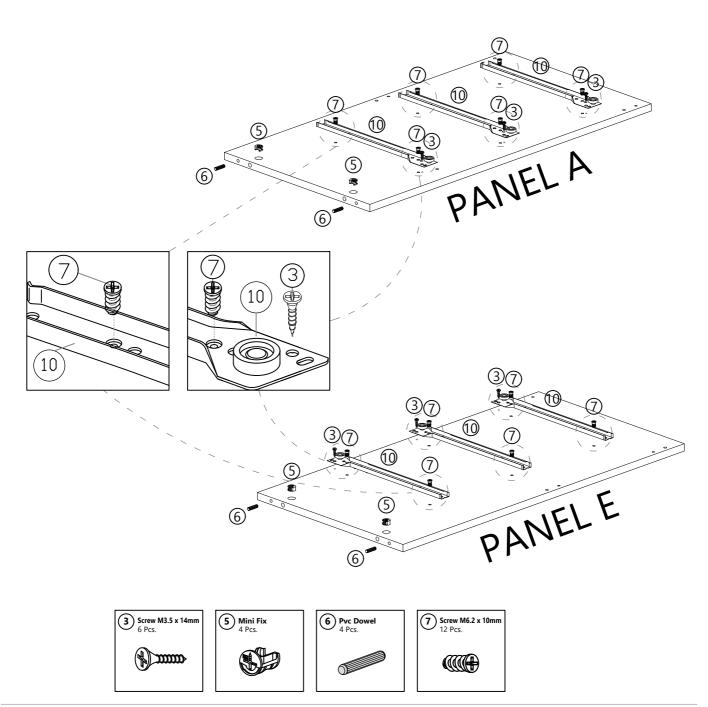


### **Pre - Assembly**

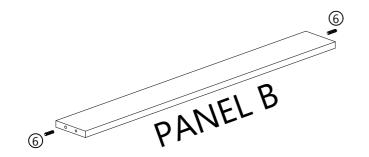


Insert the pvc dowels ⑥ to both end of the panels B,C,D and F. Using hammer to gently tap them in.

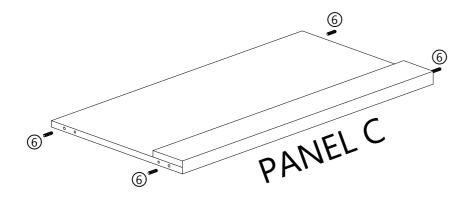


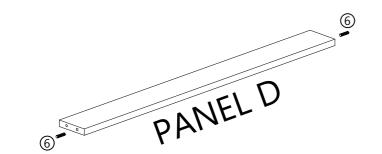

Insert, push down and tighten mini fix screw ⑤, to the non-thru hole of the panel F as shown, 4pcs.

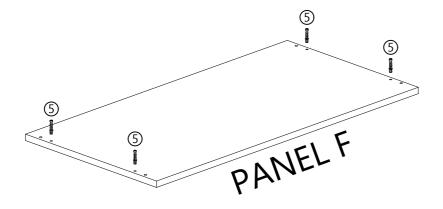







## Step 1

- 1. Place and fix Panels B,C,D onto Panel A by inserting the (Left) dowels onto the non-thru holes at Panel A.
- 2. Using Allen key 9 to tighten screws 1 from the 4 thru holes of panel  $\mbox{\mbox{\sc A}}$  , one by one.

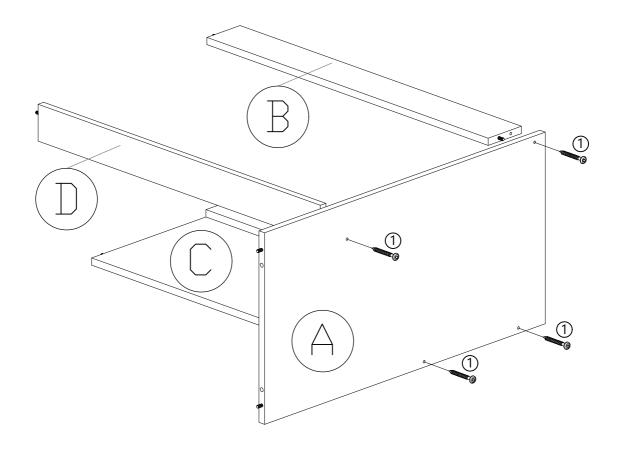





www-Hodedah·com 10 | Page

## Step 2

- 1. Place and fix Panels B,C,D onto Panel E by pushing and slotting the (Right) dowels onto the non-thru holes at Panel E.
- 2. Using Allen key 9 to tighten screws 1 from the 4 thru holes of panel  $\ensuremath{\text{\textbf{E}}}$ , one by one.

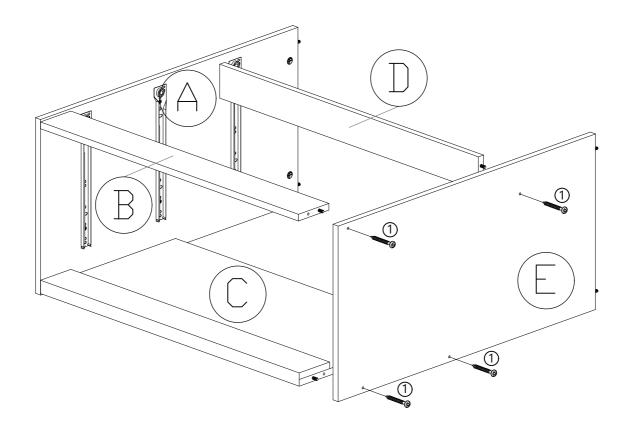





www-Hodedah·com 11 | Page

## Step 3

Place and fix panel F onto panels A and panel E, and align properly by inserting the 4 (down) mini fix screws  $\mathfrak S$  onto the L-thru holes at top edge of panel A and E. At the same time, inserting panel A and panel E 's upside dowels going onto panel E's non-thru holes.



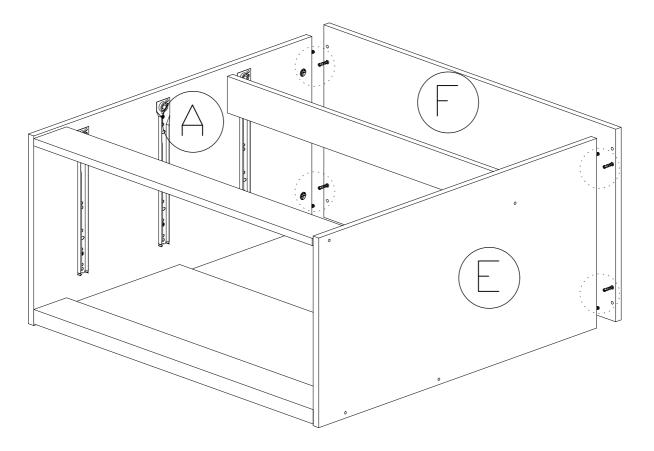




Then, tighten mini fix 5 clockwise to lock the mini fix up for tightening panel F up. Cover 4 mini fix caps provided by pushing the cover 's stem onto the hole of mini fix nut on upper side of panel A and F.


www-Hodedah·com 12 | Page

## Step 4

- 1. Insert the mini fix 5 (nuts) with the cross arrow mark facing upward and aim to panel I & J 's top thru holes. (As shown)
- 2. Insert the PVC dowels 6 to panel I, J and M 's non-thru holes as shown, using hammer to tap them in.
- 3. Insert, push down and tighten mini fix screw 5, to the hole as shown (Panel 6)

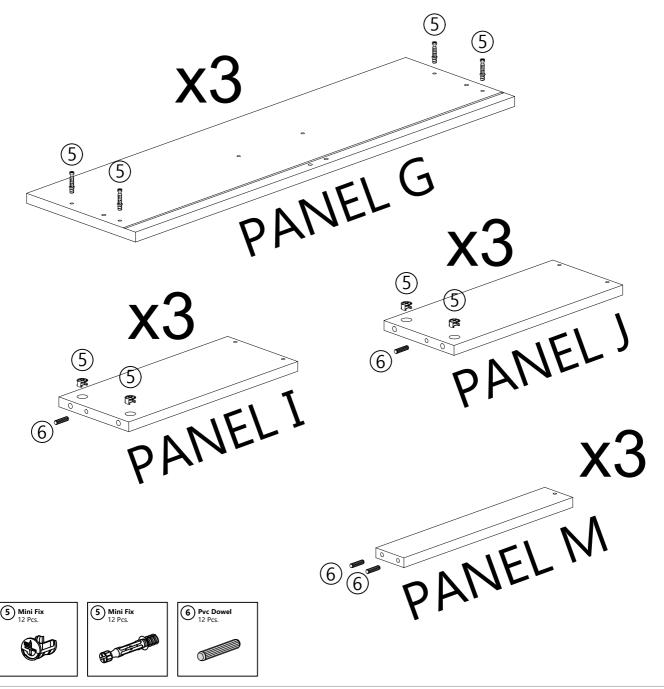

## **Assembly Of Drawers**



1. Place panel I and J on each side of panel Gwith Panel  $\boldsymbol{I}$  and  $\boldsymbol{J}$  's PVC dowel insert to panel G 's non-thru hole and Panel G 's mini fix screws insert into Panel I and J 's thru holes as shown. Then tighten mini fix on panel  $\boldsymbol{I}$  and  $\boldsymbol{J}$  clockwise to lock mini fix up.

Next, tighten screw ② to panel I and J 's upper thru holes to fix up to the panel K.

2. Flip drawer with bottom side up, place panel L onto the drawer and align properly. Then nails provided with hammer on

the border of panel L as shown. The gap between 2 nails should be about 100mm. After that, place a drawer slide B (13) with the small white roller facing outward and with other


end tip touching panel G onto each bottom side (angle) edge of panel I and J. Then tighten 3 screws ③ on each


drawer slide B (3) (as shown). Place and fix Panel M onto Panel

**G** by inserting the dowels onto the non-thru holes at Panel G. Then tighten screw 2 to panels

M 's thru holes to fix them onto

panels K and L.

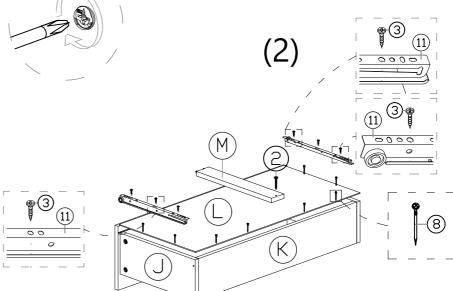



- 3. Flip the drawer over.
- 4. Tighten 2 screw 4 from inner side of panel G into the handle 8 holes.












## Step 5


- 1. Lift up the main unit carefully and let it stand up properly.
- 2. Cover all the screws 1 's head with the PVC cap provided by pushing the cover's stem onto the hole of screw head one by one for all screws on panels A and E.
- 3. Take all drawers, and slide them (the white rollers at drawer slide at both side of drawers are to go into the track of the slides at each side panel.) all the way gently, one drawer by one drawer starting from bottom one

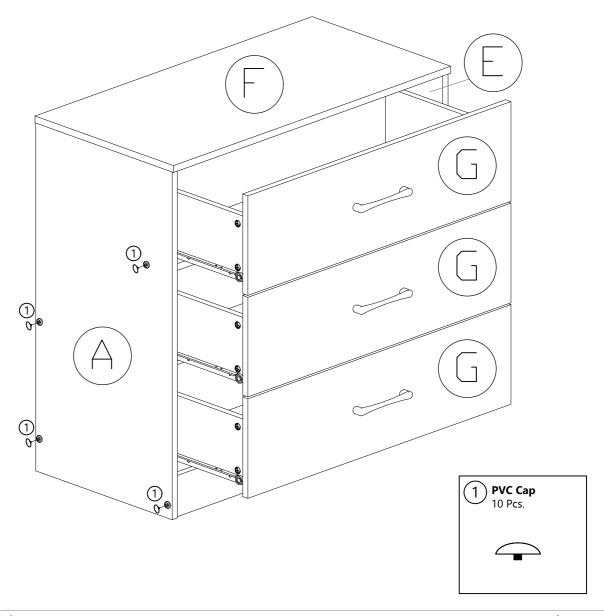

www-Hodedah·com 15 | Page


## Step 6

- 1. Place the back Panels H onto the back of the main unit as shown, then align them properly for nailing.
- 2. Then use hammer to nail the nails one by one and at center of 4 side edges. Gap between 2 nails should be about 100mm for all.

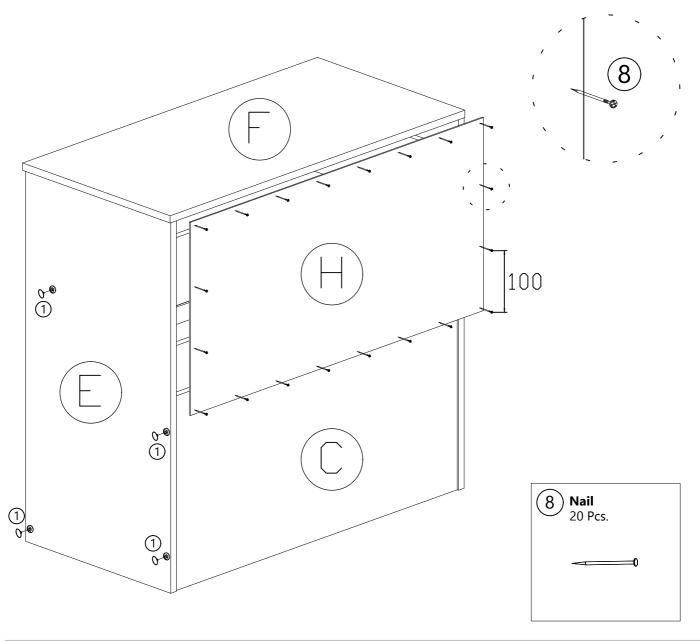

www-Hodedah·com 16 | Page

#### FITTING OF ANTI-TIP SAFETY STRAP

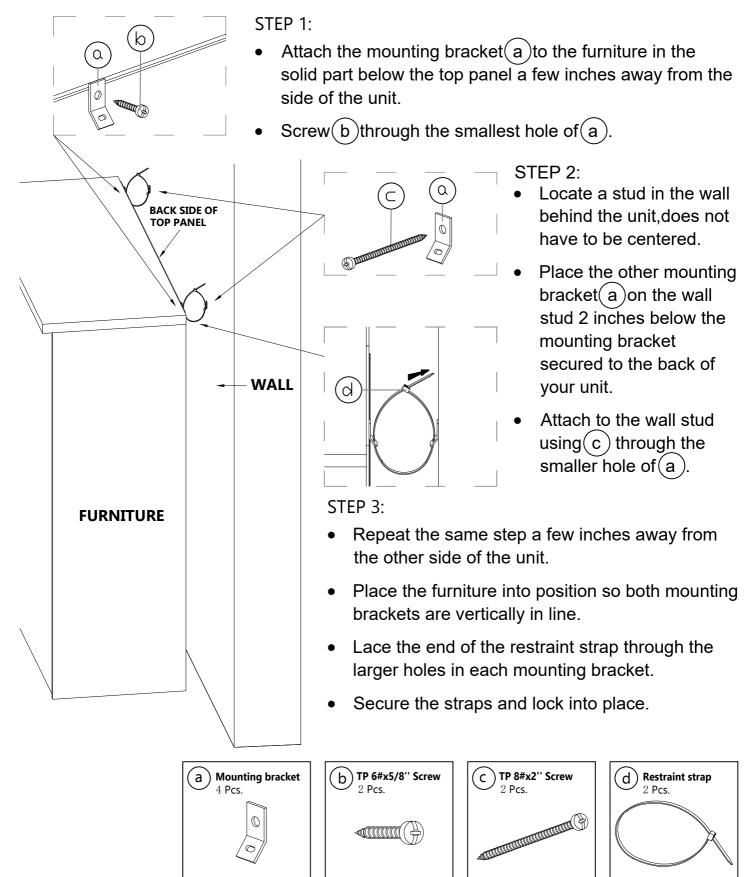

# **Completion**



Enjoy & Thank you for purchasing from Hodedah!



www·Hodedah·com 18 | Page